

IBOX-501 N13L2



Feature


Fanless All Alminum Design
Onboard Intel Skylake i3-8130U
Support MAX DDR4 2400/2666MHZ 16GB
Support 1*M.2, 1* 2.5 inches SATA
Support WIFI/3G/4G(choose 1 from 3)
Support 4*USB3.0, 2*USB2.0
Applied OS:



Specification

Model	IBOX-501 N13L2
Color	Black (Any color can be Optional)
Material	Pure Aluminum
	Support Intel Core i3 8130U (dual core, 2.2GHZ, Turbo: 3.4GHZ , TDP:15W)
Ram	Support 1*SODIMM DDR4 2400/2666MHZ (4GB/8GB/16GB) MAX: 16GB
BIOS	AMI BIOS
Display Chip	Integrated Intel HD Graphics 520
Display Port	1*DP, 1*HDMI (Support synchronous or asynchronous dual display)
Front I/O	4*USB3.0,1*Power Switch, 2*COM
Rear I/O	2*RJ45 1000M Lan, 2*USB2.0, 1*HDMI, 1*DP, 1*two-in-one Audio, 1*DC 12V Port
Expansion Slot	Support 1*MINI PCIE Channel (WIFI/3G/4G Optional)
Lan	2*RTL8111E 10/100/1000M
Storage	1*M.2 (PCIE 4X signal), 1*SATA3.0
Power Supply	DC 12V Input
Work Temp	-10℃ ~ +50℃
Work Humidity	0% ~ 95% No Condensing
Dimension	155 * 126.5 * 52.5mm
Weight	1.6 kg

IBOX-501 N13L2 Drawing

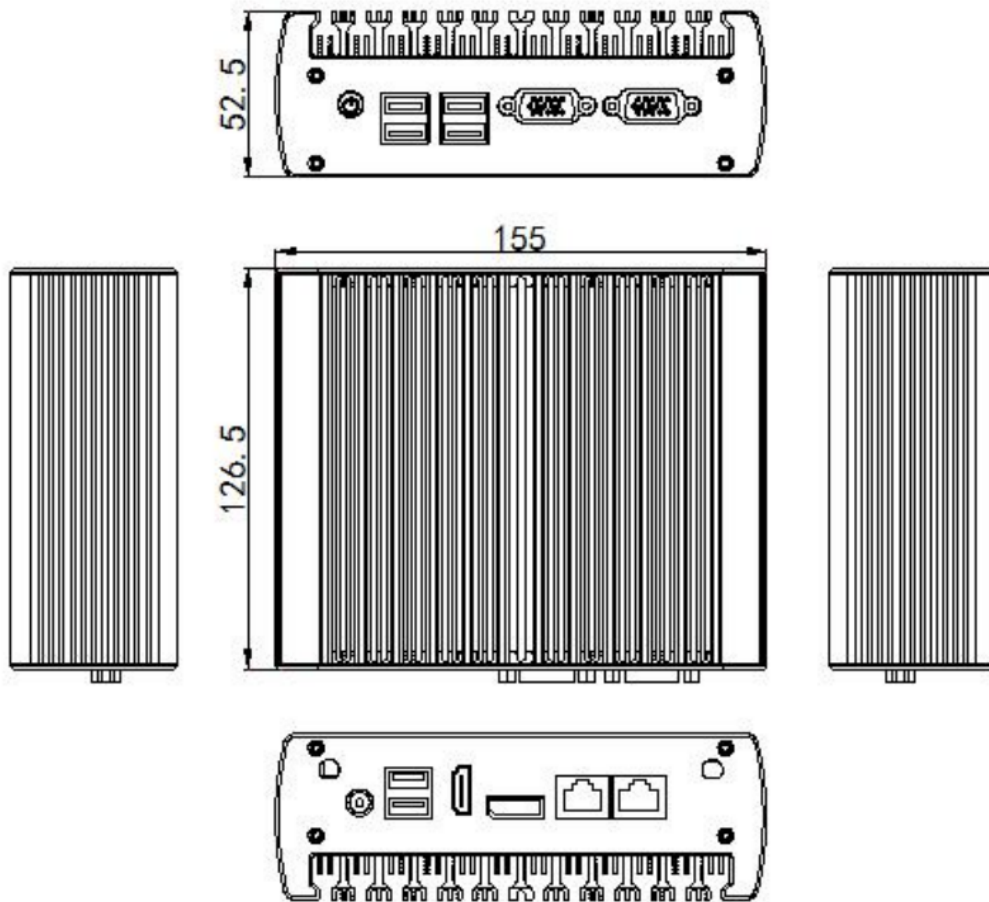

Applied Area:

Accessory		
Name	Quantity	Specification
Power Adapter	1	12V/5A
Power Cord	1	Any Plug is optional (Chinese, British, USA standard etc)
CD Driver	1	Neutral

Automation, Medical , transportation, Warehouse , electric education etc

Order Information			
Configuration 1	IBOX-501 N13L2	Intel 3865U	Standard Port
Configuration 2		Intel Core i3 7100U/ i3-8130U	Standard Port
Configuration 3		Intel Core i5 7200U	Standard Port