

Nano-N3322

Intel Core 12th generation processor Mini PC




Features:

- ◇ All aluminum structure;
- ◇ Onboard Intel Core 12th intelligent processor;
- ◇ Support 3*HDMI 4K display port, Supports synchronous and asynchronous three display;
- ◇ Support WIFI + 4G/5G in same time with 3*M.2 slot;
- ◇ Support 2*COM (support 2*RS232/RS485 mode) ;
- ◇ Support DC 12V input;
- ◇ Applicable system:



Specification

Name	Nano-N3322
Chassis color	Metallic Grey (Colors can be freely customized)
Material	High quality all aluminium
Processor	Onboard Intel Core i3 1215U (six core eight threads, Turbo. 4.4 GHz) Onboard Intel Core i5 1235U (ten core twelve threads, Turbo. 4.4 GHz) Onboard Intel Core i7 1255U (ten core twelve threads, Turbo. 4.7 GHz)
Memory	Support 1*DDR5 4800 SODIMM memory slot, Max. 32 GB
BIOS	AMI EFI BIOS
Display chip	Intel(R) UHD Graphics
Display port	3*HDMI with 4K , Support Synchronous or asynchronous display, Max.4096x2160@Hz
Front I/O	2*COM support RS232/RS485 ,1*SIM slot,4*USB3.1,1*Power button
Rear I/O	1*DC port, 3*HDMI, 3*Intel 2.5G Lan, 1*audio interface(2-in-1),4 Antenna holes
Expansion slot	Support 1*M.2 2280 M-Key slot (NVME) Support 1*M.2 3052 B-key slot (USB3.0 signal, support 4G/5G) , External SIM card slot Support 1*M.2 2230 E-key slot (support WIFI、Bluetooth)
Network	3*Intel i225-V 2.5G Lan
Storage	Support 1*M.2 2280 slot, 1*2.5inch HDD
Input	Support DC 12V input
Other functions	Power-on, timed startup, network wake up, PXE startup, watchdog (level 0-255), TPM2.0 security encryption
Working temp.	0℃ -- +40℃ (business HDD) , -20℃ -- +50℃ (industrial SSD) , Surface air flow
Working humidity	5% -- 95% Non-condensing state
Certification	CE,CCC,FCC Class A,RoHS
Dimension	170 * 140 * 58 mm
Weight	1.1 kg
Application	Industrial Control, Industrial Automation, Robot, IoT gateway, Edge computing, Machine Vision, AGV/ARM, etc.

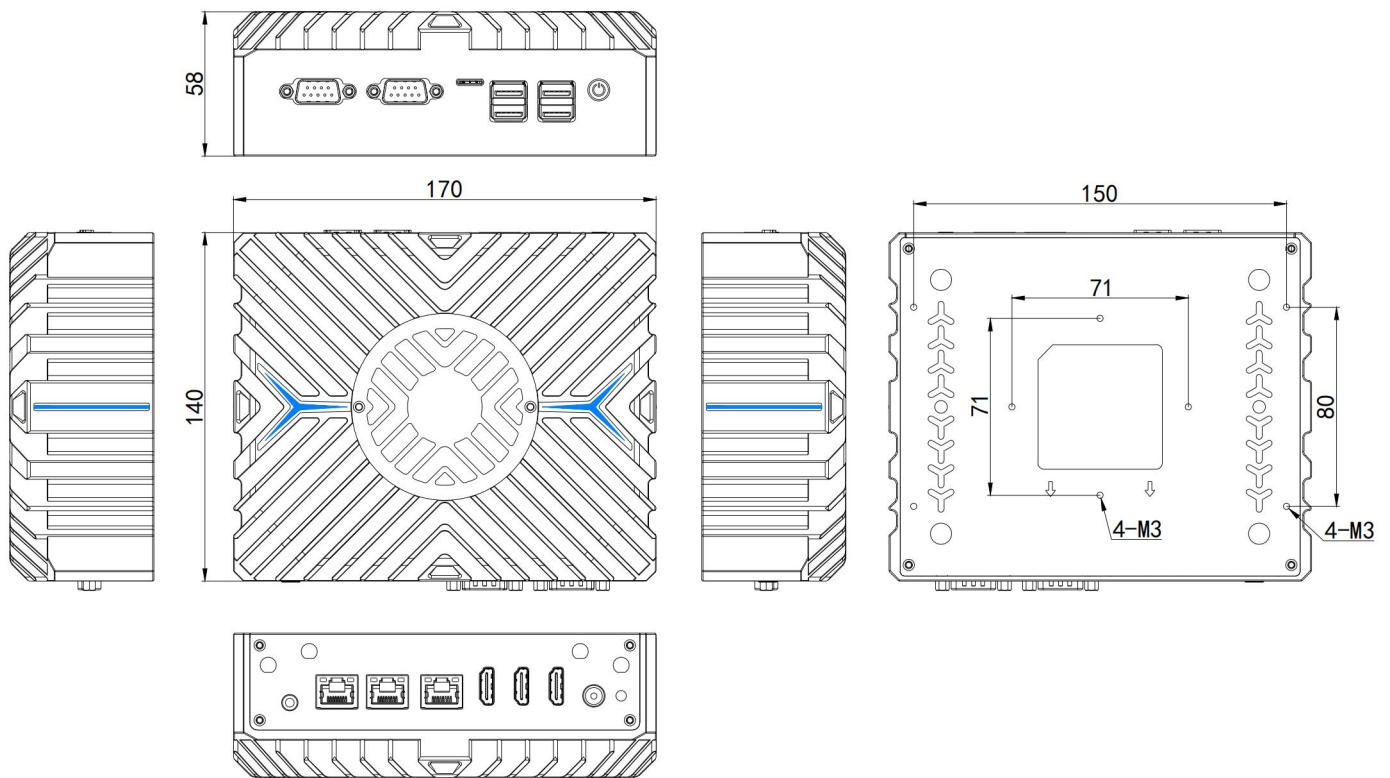

Packing list

Name	Quantity	Note
Power adapter	1	Recommend 12V 7.5A
Power cable	1	CN、US、UK、EU.etc
Qualification	1	Yanling/Neutral
Warranty Card	1	Yanling/Neutral
VESA mount	1	Standard

Configuration

Config. 1		Onboard Intel Core i3 1215U	Standard I/O
Config. 2	Nano-N3322	Onboard Intel Core i5 1235U	Standard I/O
Config. 3		Onboard Intel Core i7 1255U	Standard I/O